


EUROTORCH TH-125

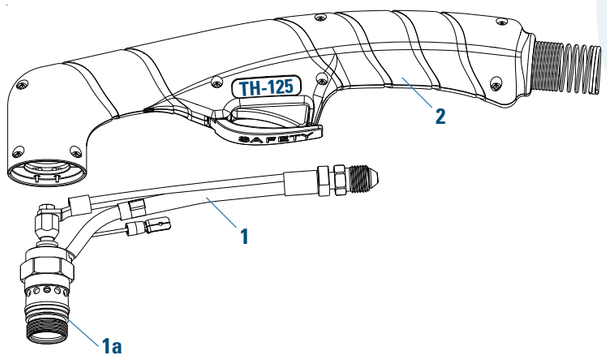

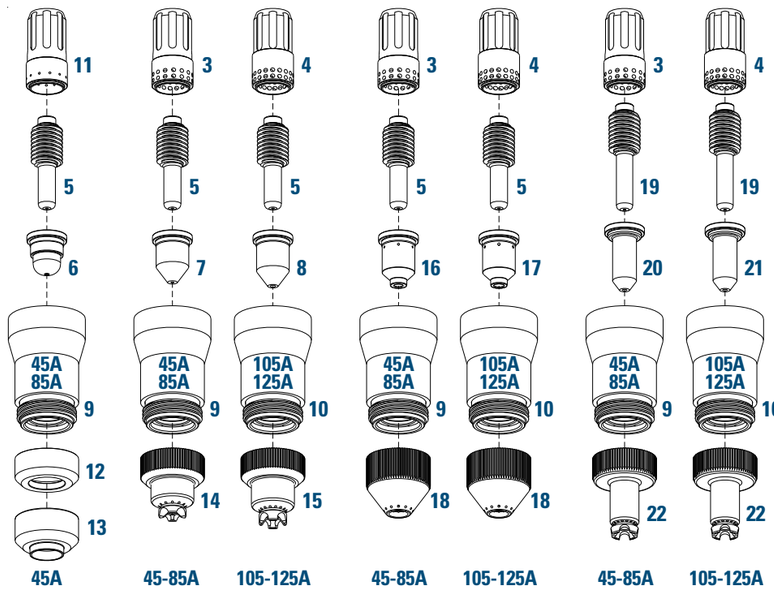



Bevel Tool
Patent pending

TECHNICAL DATA


Current:	40-125 Amps
Duty Cycle:	125 Amps at 60% - 150 Amps at 40%
Gas:	Air/N2
Gas Pressure	
Cutting 125A:	72-80 PSI (5.0-5.5 bar)
Cutting 150A:	72-80 PSI (5.0-5.5 bar)
Gouging:	58-65 PSI (4.0-4.5 bar)
Gas Flow at 125A:	630 SCFH (295 lpm)
Post Flow Time:	45 sec
Pilot:	Electrode to Tip (15-18A)
Ignition:	Without HF

RoHS COMPLIANT · EN 60974-7 · CE · CCC


Air Filter AT-1000




Standard Connection Euro Connector



EASYFIT Connection Patented



HY Connection Patent Pending



COMPLETE TORCHES

Complete Torches ECO
Complete Torches Maximum Life

	PRODUCT CODE	DESCRIPTION
TH-125 ECO	T03721-6	75° Hand Torch, 6m (20 ft) Leads, Rubber Cable, Euro Connector
TH-125 ECO	T03721-12	75° Hand Torch, 12m (40 ft) Leads, Rubber Cable, Euro Connector
TH-125	T03721CX	75° Hand Torch, 6m (20 ft) Leads, Coaxial Cable, Euro Connector
TH-125	T03726CX	75° Hand Torch, 12m (40 ft) Leads, Coaxial Cable, Euro Connector

TORCH DESCRIPTION

● TH-125 ECO Standard Layout
● TH-125 Standard Layout

		PRODUCT CODE	DESCRIPTION
●●	1	T03700	TH-125 75° Hand Torch Head
	1a	T03700.60	O-Ring
●●	2	T03705	Handle TH-125 75° complete with parts
	3	T60042E	Swirl ring, 45-85A ECO
		T60042	Swirl ring, 45-85A Maximum Life
●	4	T60040E	Swirl ring, 100-125A ECO
●		T60040	Swirl ring, 100-125A Maximum Life
●	5	T52677	Electrode, 45-125A
	6	T51415	Tip, Cutting, 45A Precision Cut
	7	T51416	Tip, Cutting, 45A
		T51417	Tip, Cutting, 65A
		T51418	Tip, Cutting, 85A
	8	T51419	Tip, Cutting, 105A
●●		T51419.16	Tip, Cutting, 125A
		T51419.18	Tip, Cutting, 150A
	9	T60309EA	Shield Cup Body, 45-85A ECO
		T60309TA	Shield Cup Body, 45-85A Maximum Life
●	10	T60309EC	Shield Cup Body, 100-125A ECO
●		T60309TC	Shield Cup Body, 100-125A Maximum Life
	11	T60032	Swirl ring, 45A, Precision Cut Maximum Life
	12	T51928	Deflector
	13	T51931	Deflector, 45A Precision Cut
	14	T51921	Shield Cap, Hand, 45-85A
●●	15	T51926	Shield Cap, Hand, 100-125A
	16	T51417G	Tip, Gouging, 65-85A
	17	T51418G	Tip, Gouging, 105A
		T51419G	Tip, Gouging, 125A
	18	T51927G	Shield Cap, Gouging
	19	T52677L	Extended Electrode
	20	T51417L.12	Extended Tip, 65A
		T51417L.13	Extended Tip, 85A
	21	T51417L.15	Extended Tip, 105A
		T51417L.17	Extended Tip, 125A
	22	T51926L	Extended Shield 65-125A

ACCESSORIES

	PRODUCT CODE	DESCRIPTION
N/S	T51865	Circle Cutting Attachment
23	T51880	BEVEL TOOL

Torches with different cable covers and connectors available on request.

Note: About the registered trade mark, reference number of the model of the machine and spare parts, please see pag 6.